TECHNICAL DATA SHEET

HEXON SUPER PLUS 20W-50

-HEAVY DUTY-

DESCRIPTION

A high-quality multigrade synthetic-based engine oil formulated for heavy-duty vehicles under various working conditions.

CARACTERISTICS

- Total engine protection: performance in keeping the engine clean.
- It does not lose its protective properties even under difficult work conditions thanks to the stable durability of the film it forms.
- Drain interval extension: the long period between oil changes.
- Provides efficient protection, especially for high-mileage vehicles.
- Ensures trouble-free engine operation in all seasons thanks to its high viscosity index.

APPLICATION

High-performance mainly on turbo diesel engines as well as gasoline engines of commercial vehicles that are frequently subject to urban traffic, construction, and mining sectors.

PERFORMANCE

API SN-SM-SL/CF, ACEA A3/B4, MB 229.1/228.1/227.1, MAN 270, MIL-L-2104 D, Ford M2C.153E, VW 501 01/505 00

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density, @15 C	*ASTM D 4052*	*g/ml*	*0,875*
K.Viscosity @40 C	*ASTM D 445*	*cSt*	*69,02*
K.Viscosity @100 C	*ASTM D 446*	*cSt*	*11,40*
Viscosity Index	*ASTMD D 2270*		*169*
Flash Point	*ASTM D 92*	*°C*	*225*
Pour Point	*ASTM D 97*	*°C*	*-36*

** Values shown may differ between productions*

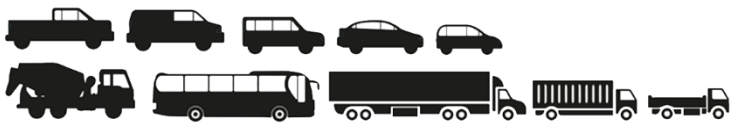

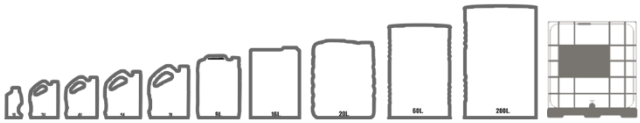

ÖZERŞAH group
info@ozersahenerji.com
www.ozersahgroup.com
+90 262 502 01 97
Çerkeşli Köyü Yolu Üzeri GEBKİM Kimyacılar OSB, Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey
Haci Sabancı O.S.B Toros Cad. No:21 Sarıçam/Adana, Turkey.